

SPLIT

HORIZONTAL EVAPORATOR

12V BSP00041AC12 / 24V BSP00041AC24



Bergstrom

STANDARD PRODUCTS

A/C



Performance

12V	24V	airflow
cold ❄️ 6,820 BTU/hr	cold ❄️ 10,920 BTU/hr	264 SCFM 🌀

Electrical Data

volts	amps	volts	amps
12V	32-65A	24V	30-55A

Applications



Performance Input Data


temperature 104°F	humidity 32%
----------------------	-----------------

Minimum alternator required: **24V** - 75 A/h - 28V / **12V** - 80A/h - 15V

Minimum battery required: **24V/12V** - 180 A

A/C Electrical Unit

Front and Controls

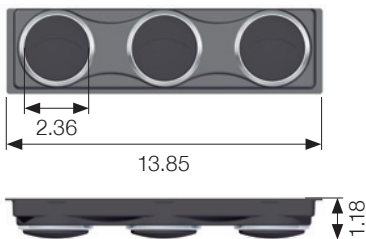


Display



Control remote

Position

Multiple mounting of components

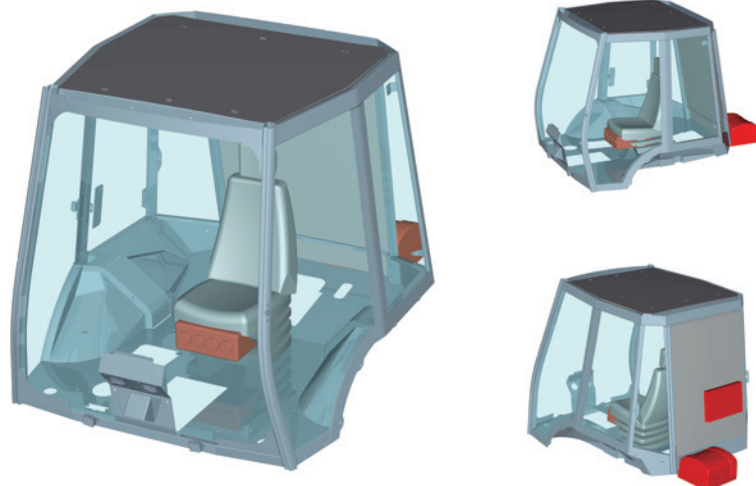








Bergstrom

STANDARD PRODUCTS

SPLIT

HORIZONTAL EVAPORATOR

12V BSP00041AC12 / 24V BSP00041AC24

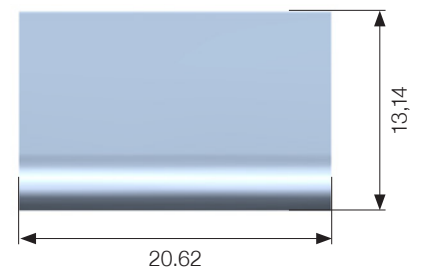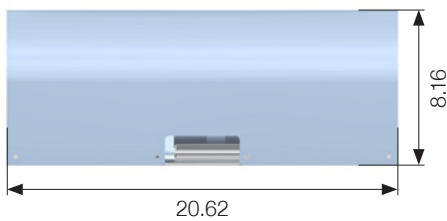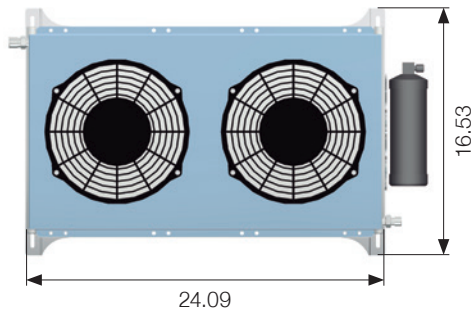


Weight



8.3 lbs

Evaporator



14.3 lbs

Condenser



150.6 lbs

Compressor

To ensure you have a complete kit to enable you chosen system to operate please check the system schematic data sheet which details the full list of components required.

T // 1.800.499.6849

E // enquiries@bergstromstandardproducts.com

W // www.bergstromstandardproducts.com